


Section A-A
Not to Scale

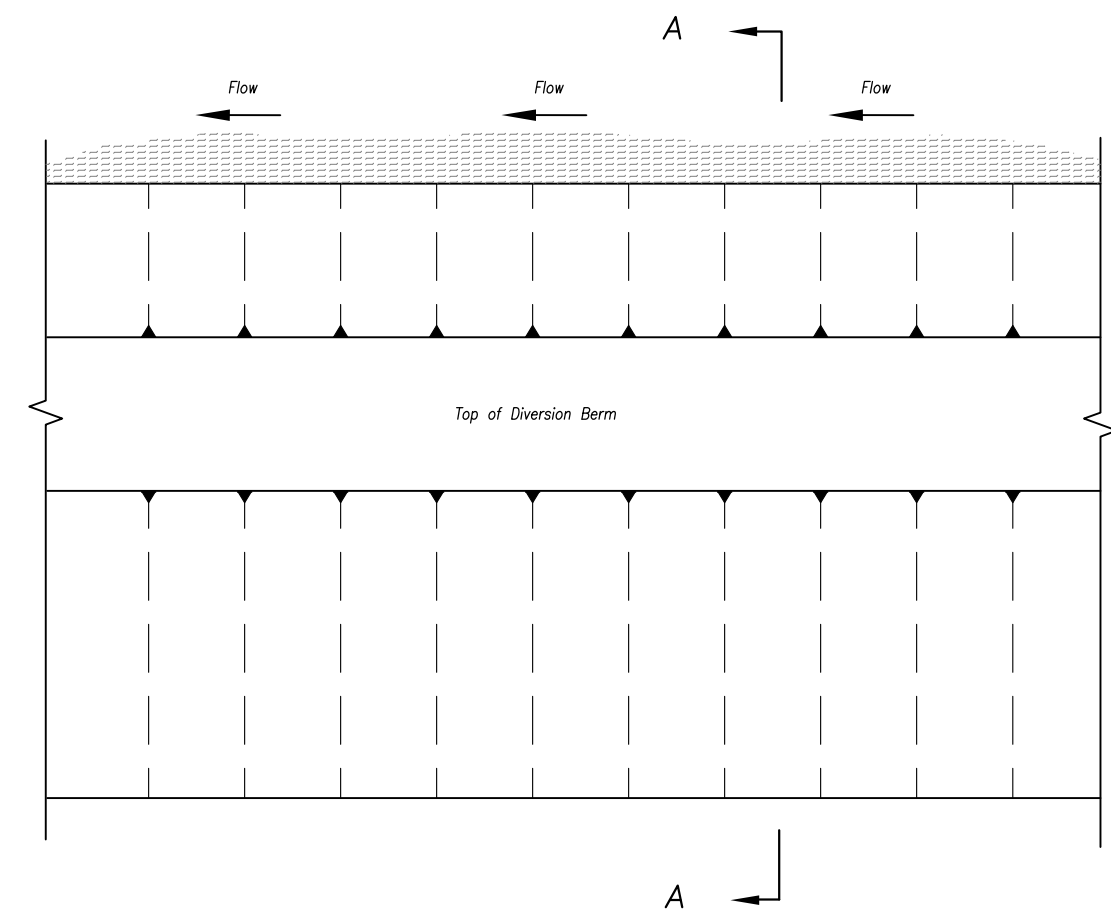

Plan View
Not to Scale

Notes:

1. Overland Park Municipal Code (OPMC) and Overland Park Design and Construction Standards Manual (OPDCSM) are incorporated, except as otherwise noted.
2. Temporary diversion berms must be installed as a first step in the land-disturbing activity and must be functional prior to upslope land disturbance.
3. The berm should be adequately compacted to prevent failure.
4. Temporary or permanent seeding and mulch shall be applied to the berm immediately following its construction.
5. Place the berm so to minimize damages by construction operations and traffic.
6. The berm must discharge to a temporary sediment trap or stabilized area.
7. All trees, brush, stumps, obstructions and other objectionable material shall be removed and disposed of so as not to interfere with the proper functioning of diversion.
8. The diversion shall be excavated or shaped to line, grade and cross-section as required to meet the criteria specified herein, free of irregularities which will impede flow.
9. Fills shall be compacted as needed to prevent unequal settlement that would cause damage in the completed diversion. Fill shall be composed of soil which is free from excessive organic debris, rocks or other objectionable materials.

Maintenance:

Berm shall be reshaped, compacted, and stabilized as necessary to maintain its function. Breaches in the berm shall be repaired immediately.

Year 2018 Edition

REVISIONS:	<p>ABOVE AND BEYOND. BY DESIGN.</p>
RELATED ORDINANCES:	DEPARTMENT OF PUBLIC WORKS STANDARD DETAILS
OPMC Title 15	TEMPORARY DIVERSION BERM
WEB SITE ADDRESS: http://www.opkansas.org/_bus/pre-construction_resources	DATE: 01/10/2015
	SHEET: 40